


SMART Board™ for Flat-Panel Displays Interactive Whiteboard

Specifications – Model PX350 for Select 50" Flat Panel Displays

NOTE: For a complete list of supported flat panel displays, visit www.smarttech.com/products/overlay/specs.asp.

Physical Specifications

Interactive Whiteboard	54 1/4" W × 35 1/4" H × 2 3/8" D (137.8 cm × 89.5 cm × 6.0 cm)
Mounting Bracket	50" W × 6 1/2" H × 3 3/4" to 6" D (127.0 cm × 16.5 cm × 9.5 cm to 15.2 cm)
Pen Tray	3 5/8" (9.2 cm) added to the interactive whiteboard's height 2" (5.1 cm) added to the interactive whiteboard's depth
Weight	60 lb. (27.2 kg)
Shipping Size	
1 unit	59" W × 49" H × 14" D (149.9 cm × 124.5 cm × 35.6 cm)
3 units on pallet	60" W × 54" H × 43" D (152.4 cm × 137.2 cm × 109.2 cm)
Shipping Weight	
1 unit	101 lb. (45.9 kg)
3 units on pallet	325 lb. (147.7 kg)

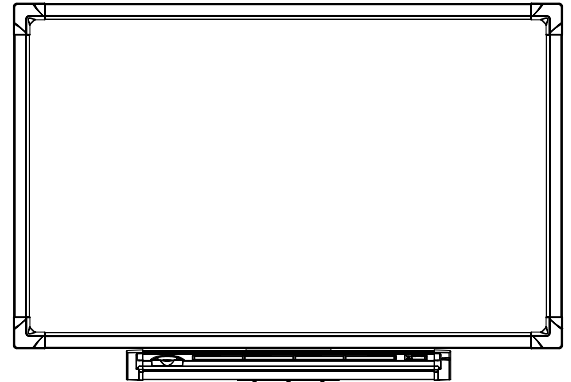

All dimensions +/- 1/8" (0.3 cm). All weights +/- 2 lb. (0.9 kg).

Standard Features

Software	SMART Board™ software and Notebook™ software. Free software upgrades are available at www.smarttech.com/support/software/index.asp .
Pen Tray	Optical sensors in the pen tray detect when a pen or eraser is lifted from the tray. LED indicators show the active tool. Includes four pen tray pens (black, blue, red and green) and an eraser. The pen tray connects to the interactive whiteboard with a modular cable and connects to a computer with a 21' 6" (6.5 m) USB/Serial Adapter cable. The USB/Serial Adapter cable has a DB9F connector at one end and a USB connector at the other. An optional serial cable is available. NOTE: To order the interactive whiteboard without the pen tray, add "NP" to the end of the model number. The pen tray is then replaced by an electronic controller that fastens behind the overlay.
Display Control Strip	The display control strip allows you to initiate sleep mode, select the input source, toggle the display mode and access the panel control menu. This feature is only available for the Windows® operating system.
Mounting Brackets	The mounting bracket has an adjustable depth feature to accommodate most 50" flat panel displays installed in landscape orientation.
Front Surface Material	Hard-coated, anti-glare polyester designed for optimal light transmission. Chemical and scratch resistant.
Digitizing Technology	DViT™ (Digital Vision Touch) technology uses digital cameras to track an object interacting with the display surface.
Flat Panel Display Connection	Serial cable included for flat panel display control – 10' (3.1 m), DB9F-to-DB9F (not available for some models).
Power Requirements	Switching power supply, 100V–250V AC, 47 Hz–63 Hz, 12V DC 4.2A, 6' (1.8 m) power cord.
Power Consumption	Power consumption is up to 40 W.
Certifications	CE

Specifications – Model PX350 for Select 50" Flat Panel Displays

Warranty	Two-year limited equipment warranty.
Installation Notes	You can install the interactive whiteboard on a flat panel display that is securely mounted to a wall or floor stand. However, because of stability and mechanical fit issues, table stands are never to be used. You cannot attach speakers directly to the sides of a flat panel display when an interactive whiteboard is installed.

SMART Board Software 9.5 Computer Requirements

Windows Computers	Pentium® II 450 MHz processor 128 MB of RAM (256 MB recommended) 136 MB of free hard disk space for minimum installation (511 MB for full installation with Gallery collections) Windows 2000 operating system (or later) Microsoft Internet Explorer® 6.0 (or later) Macromedia® Flash® player version 8 (or later)
--------------------------	---

NOTE: If you're using a Windows operating system that doesn't meet these minimum requirements, download SMART Board software service pack 4 from www2.smarttech.com/st/en-US/Support/Downloads/SBS/SBSv95Win.htm.

Requirements for SMART Video Player	700 MHz processor or faster recommended Microsoft® DirectX® technology 8.1 (or later)
Mac Computers	700 MHz processor (1 GHz or faster recommended) 128 MB of RAM (256 MB recommended) Mac OS X versions 10.3.9 and 10.4.x 148 MB of free hard disk space for minimum installation (423 MB for full installation with Gallery collections) Safari™ 1.3.2 or later SMART Board software version 9.5 supports Intel® processors (Universal Binary)

NOTE: Previous versions of SMART Board software are compatible with earlier versions of the Mac OS X operating system. Download previous versions of SMART Board software from www2.smarttech.com/st/en-US/Support/Downloads/SBS/Mac/.

Linux® Computers	Pentium II 450 MHz processor 128 MB of RAM (256 MB recommended) 185 MB of free hard disk space for minimum installation (460 MB for full installation with Gallery collections) Linux kernel version 2.6 (or later) X Windows version 11 release 6 (X11R6) or later (the X Windows version must support XRENDER and Xinerama) glibc 2.3.3 (gcc 3.4.2) libstdc++6 Gnome 2.8.0+ or KDE® 3.3+ libraries (recommended) SUSE® 10, Red Hat® Enterprise Linux 4 WS, Debian 3.1 (Sarge), Ubuntu 6.06 LTS or Fedora Core™ 3+
-------------------------	---

Storage and Operating Specifications

Storage	-40°F to 95°F (-40°C to 35°C) with up to 80% humidity non-condensing.
Operation	41°F to 95°F (5°C to 35°C) with up to 80% humidity non-condensing.


SMART Order Number

PX350	Interactive whiteboard for select 50" flat panel displays.
PX350NP	Overlay without pen tray for select 50" flat panel displays.
93-00360	Optional 20' (6.1 m) straight-through DB9F-to-DB9F serial cable for systems that don't support USB connections. Must be ordered separately.


Specifications – Model PX350 for Select 50" Flat Panel Displays

All dimensions +/- 1/8" (0.3 cm)


Front View

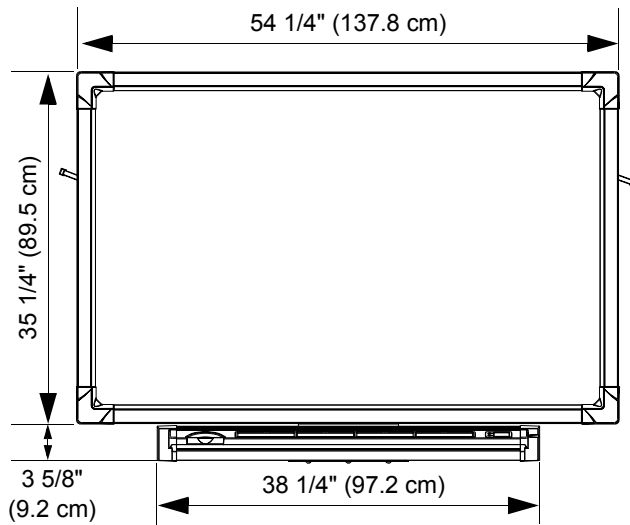

Back View

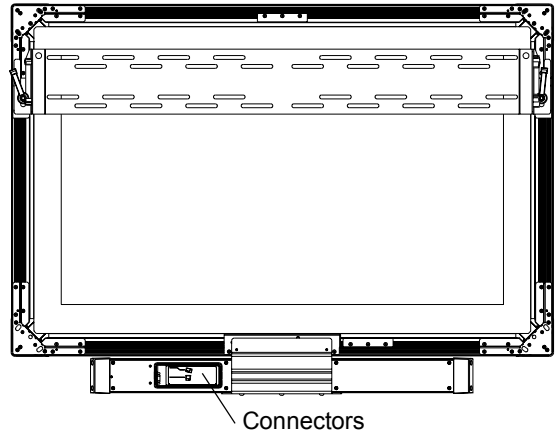

Side View

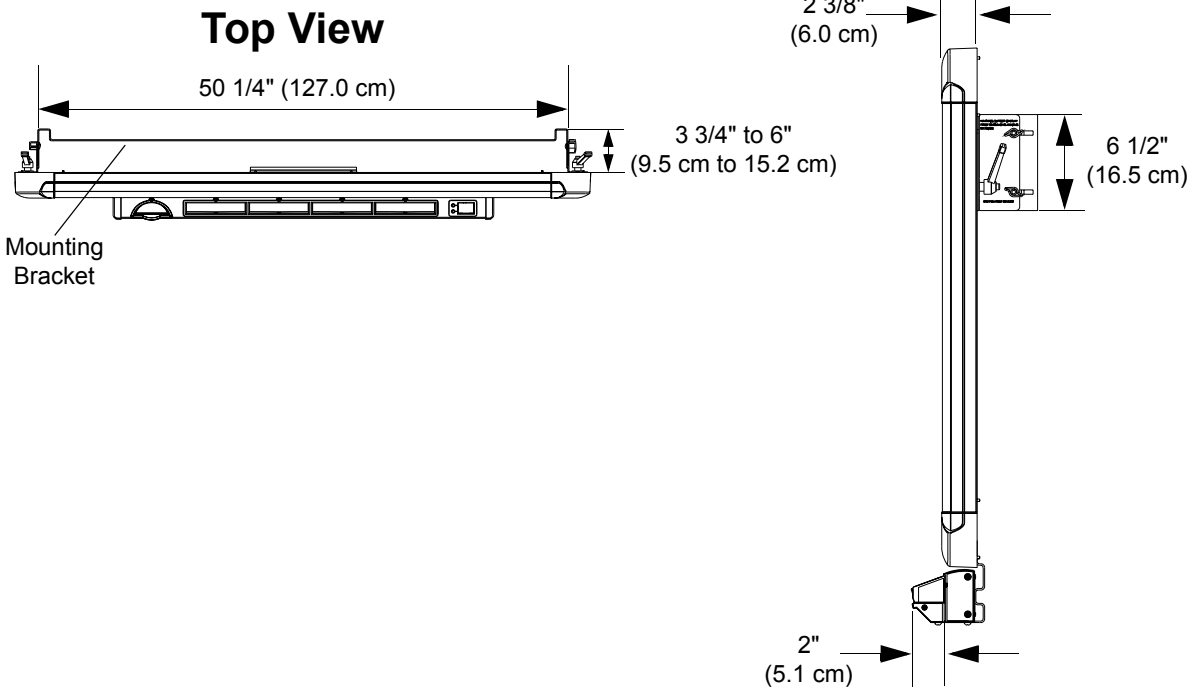

SMART Technologies Inc.
1207 – 11 Avenue SW, Suite 300
Calgary, AB T3C 0M5
CANADA

SMART
Technologies

www.smarttech.com/support www.smarttech.com/contactsupport
Support +1.403.228.5940 or Toll Free 1.866.518.6791 (Canada/U.S.)

© 2003–2007 SMART Technologies Inc. All rights reserved. SMART Board, Notebook, DVIT, smarttech and the SMART logo are trademarks of SMART Technologies Inc. Windows is a registered trademark of Microsoft Corporation in the U.S. and other countries. All other third-party product and company names may be trademarks of their respective owners. U.S. Patent Nos. 5,448,263; 6,141,000; 6,326,954; 6,337,681; 6,741,267; 6,747,636; 6,803,906; 6,919,880; 6,947,032; 6,954,197; 6,972,401 and 7,151,533. Canadian Patent No. 2,058,219. European Patent No. 1,297,488. Other U.S., Canadian and foreign patents pending. Specifications are subject to change without notice. 02/2007.